(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 22 July 2004 (22.07.2004)

PCT

(10) International Publication Number WO 2004/061898 A2

(51) International Patent Classification7:

H01L

(21) International Application Number:

PCT/US2003/037046

(22) International Filing Date:

17 November 2003 (17.11.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/437,922

2 January 2003 (02.01.2003) US

(71) Applicant (for all designated States except US): PDF SO-LUTIONS, INC. [US/US]; 333 West San Carlos Street, Suite 700, San Jose, CA 95110 (US).


(72) Inventors; and

(75) Inventors/Applicants (for US only): CIPLICKAS, Dennis [US/US]; 2441 Schubert Avenue, San Jose, CA 95124 (US). DAVIS, Joe [DE/US]; Frottmaningerstrasse

19, Unterschleissheim 85716 (DE). HESS, Christopher [DE/US]; 320 South Overlook Drive, San Ramon, CA 94583 (US). LEE, Sherry [US/US]; 935 Wren Drive, San Jose, CA 95125 (US). Malavasi, Enrico [US/US]; 1371 Ormonde Way, Mountain View, CA 94043 (US). MOHAMMAD, Abdulmobeen [IN/US]; 180 Elm Court #1808, Sunnyvale, CA 94086 (US). RADOJCIC, Ratibor [US/US]; 850 Beech Street Unit 610, San Diego, CA 92101 (US). STINE, Brian [US/US]; Ebisu Garden Terrace #1503, Mita 1-4-3, Meguro-ku, Tokyo-to 153-0062 (US). VALLISHAYEE, Rakesh [IN/US]; 6338 Nepo Drive, San Jose, CA 95119 (US). ZANELLA, Stefano [IT/US]; 3200 Payne Avenue #724, San Jose, CA 95117 (US). DRAGONE, Nicola [IT/IT]; Via Penella 37, Vobarno, Brescia 125079 (IT). GUARDIANI, Carlo [IT/IT]; Via Seghe, San Tommaso 7/A, Verona (VR) 37129 (IT). QUARANTELLI, Michel [IT/IT]; Via Giovanni XXIII, 10, Noceto, (PR) 143015 (IT). TONELLO, Stefano [IT/IT]; Via 4 Novembre 14, Breganze, (VI) 36042 (IT).

[Continued on next page]

(54) Title: YIELD IMPROVEMENT

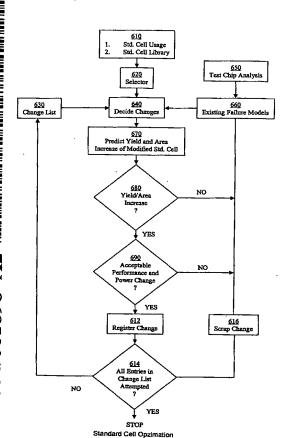

(57) Abstract: An integrated circuit is designed to improve yield when manufacturing the integrated circuit, by obtaining a design element from a set of design elements used in designing integrated circuits. A variant design element is created based on the obtained design element, where a feature of the obtained design element is modified to create the variant design element. A yield to area ratio for the variant design element is determined. If the yield to area ratio of the variant design element is greater than a yield to area ratio of the obtained design element, the variant design element is retained to be used in designing the integrated circuit